

Acute MSO3000

6-in-1 Instrument

DAQ, DSO, DVM, Frequency Counter,
Logic Analyzer, Protocol Analyzer

- PC-based, USB3.0 interface / powered (Type-A / Type-C)

- Record length : 128 (256) Mpts / Analog (Digital) CH

① Data Logger : HDD / SSD Storage

② DSO : 4 Channels, 1 GS/s S/R, 200 MHz bandwidth

③ Digital Voltmeter : 3 digits

④ Frequency Counter : 5 digits

⑤ Logic Analyzer : 16 Channels, 2 GS/s Timing Analysis, 250 MHz State Analysis

Protocol Decode : CAN 2.0B/CAN FD, DP_Aux^[1], eSPI, I²C, I²S, MII, MIPI I3C 1.1, MIPI SoundWire, MIPI SPMI 2, SPI Flash, SVI3^[2], SVID^[3], UART, USB PD 3.1, ... (100+)

Protocol Trigger : CAN2.0B/CAN FD, eSPI, MII, MIPI I3C 1.1, RGMII, SVI3^[2], SVID^[3], ... (30+)

⑥ Protocol Analyzer : CAN2.0B/CAN FD, eSPI, MII, MIPI I3C 1.1, RGMII, SVI3^[2], SVID^[3], ... (20+)



150 x 123 x 33 mm³
Device Weight: 400g

Model	Vertical Resolution (DSO)	DSO Trigger / Protocol Trigger (DSO)	Protocol Trigger (Logic Analyzer)	Electrical Validation ^[*]
MSO3124E	8 bits	I / -	I	-
MSO3124B	8 bits	I, II / Yes	I, II	-
MSO3124H	8, 12~16 bits	I, II / Yes	I, II, III	-
MSO3124V	8, 12~16 bits	I, II / Yes	I, II, III	I2C, MIPI I3C, ...

Software Window



System Requirements

- USB 3.0 port
- Windows 7/8/10/11 (64-bit)
Linux Ubuntu (64-bit)*
macOS*
- PC RAM 16GB (recommended) or 8GB at least

* Free update by year end 2023.



Acute[®]
PC-based T&M Instruments

Acute Technology Inc.

Tel: +886-2-2999-3275 E-mail: service@acute.com.tw http://www.acute.com.tw



DSO Specifications (Main Device)

Model	MSO3124E	MSO3124B	MSO3124H	MSO3124V		
Power	Power source	USB bus-power (+5V)				
	Static power consumption	4.5W				
	Max power consumption	7.7W				
Acquisition	Mode	Sample, Average, Envelope ^[*] , Peak detect ^[*] , High resolution ^[*]				
	Sampling @ 1Ch	1 GS/s	1 GS/s 500 MS/s 100 MS/s			
	Sampling @ 2Ch (8 12 ≥14 bits)	500 MS/s	500 MS/s 250 MS/s 100 MS/s			
	Sampling @ 4Ch	250 MS/s	250 MS/s 125 MS/s 100 MS/s			
	Record length @ 1Ch	512 Mpts	512 Mpts 256 Mpts			
	Record length @ 2Ch (8 ≥12 bits)	256 Mpts	256 Mpts 128 Mpts			
	Record length @ 4Ch	128 Mpts	128 Mpts 64 Mpts			
Input	Input channels	4				
	Input coupling	AC/DC				
	Input impedance	$1\text{ M}\Omega \parallel <19\text{ pF}$				
	Overvoltage protection	$\pm 100\text{ V (DC+AC peak)}$				
	Ch-Ch isolation	50dB @ DC to 100MHz; 40dB @ 100MHz to 200MHz				
Temperature	Ch-Ch skew	100 ps between two channels with the same scale & coupling settings				
	Operating / Storage	5°C~40°C (41°F~104°F) / -10°C~65°C (14°F~149°F)				
I/O port	Trig-In	Workable : 2.5V to 5V / Typical : TTL 3.3V (Rising/Falling)				
	Trigger pulse approval	> 8 ns				
	Trig-Out	TTL 3.3 V				
	Ref. Clock input	10MHz, Vpp=3.3 to 5V				
	Ref. Clock output	10MHz, TTL 3.3V				
Vertical	Connector type	MCX jack / female				
	Bandwidth	200 MHz				
	Rise time	1.75 ns @ 200 MHz; 3.5 ns @ 100 MHz; 7 ns @ 50 MHz				
	Resolution	8 bits	8, 12, 14, 15, 16 bits			
	Input sensitivity	2 mV/div to 10 V/div (Full-Scale: ±4 div/screen, ±1 div beyond screen)				
Horizontal	Offset range	±150 V @ 2, 5, 10 V/div; ±1.5 V @ 0.2, 0.5, 1 V/div; ±1.5 V @ 2, 5, 10, 20, 50, 100 mV/div				
	DC accuracy	±3% of Full-Scale				
	Bandwidth limit	20 MHz, 100 MHz or Full				
	Time scale	1 ns/div to 100 s/div (10 div/screen)				
Trigger	Time resolution	125 ps				
	Time accuracy	±10 ppm				
	Delay range	Pre-trigger: 0 to 100% of 1 screen; Post-trigger up to 50 sec.				
	Trigger mode	Auto, Normal, Single, Roll [*]				
Protocol Trigger / Decode	Source	Ch1, Ch2, Ch3, Ch4, Ext. (TTL only)				
	Coupling	DC, LF reject (50kHz), HF reject (50kHz), Noise reject				
	Trigger range	±4 div from window center				
	Vertical sensitivity	1 div or 5 mV @ <10 mV/div; 0.6 div @ ≥ 10 mV/div				
Protocol Decode	Hold off range	~60 ns to 10 sec.				
	DSO I	Edge, Either, External, Falling, Rising, Video, Width				
	DSO II	Runt, Pattern/State, Timeout, Transition, Setup/Hold, B-Trigger, B-Event, Window				
		BiSS-C, CAN 2.0B/CAN FD, DALI, DP_Aux ^[1] , HID over I2C, I2C, I2S, LIN2.2, MDIO, Mini/Micro LED, MIPI I3C 1.1, MIPI RFFE 3, MIPI SPMI 2, Modbus, PMBus, ProfiBus, SENT, SMBus, SPI, SVI2, UART(RS232) ^[2] , USB PD 3, USB1.1				
Measurement/ Processing		1-Wire, 3-Wire, AccMeter, APMI, AVSBus, BSD, CEC, Closed Caption, CODEC_SSI, DDC(EDID), DMX512, FlexRay, HD Audio, HDLC, HDQ, HTSensor, I2C(EEPROM), IrDA, ISELED Digital RGB LED, JVC IR, LED_CTRL, M-Bus, MDDI, MHL CBUS, Microchip SWI, MICROWIRE, MIPI CSI LP, MIPI DS1 LP, MIPI SoundWire, NEC IR, PCM, PDM, PECL, PS/2, PWM, QE1, QI, RC-5, RC-6, RT_SWI, S/PDIF, SDQ, Serialized IRQ, GPIO, Smart Card (ISO7816), SMI, SSI, ST7669, SWIM, SWP, UNI/O, USB4/TBT3 SB, Wiegand				
	Measurement	Frequency, Period, ±Duty, ±Period, Rise/ Fall Time, Delay, Phase; VMax, VMin, VHigh, VLow, Vpp, VAmp, VMid, VMean, VRMS, ±Overshoot, Rise/ Fall Preshoot; Edge Count, ±Pulse Count				
	Cursor	Time difference, Voltage difference				
	Math	+, -, ×, ÷, XY, IAI, √A, Log(A), Ln(A), ∫Adt, e ^A				
	FFT	Rectangular, Blackman, Hann, Hamming, Harris, Triangular, Cosine, Lanczos, Gaussian. (Vertical Scale: dBm RMS, dBV RMS, Linear RMS)				
Electrical Validation (Protocol) ^[*]	Export data	WORD, EXCEL, CSV, TEXT, HTML, MATLAB				

		I2C, I2S, MIPI I3C, MIPI RFFE, MIPI SPMI, PDM, SPI, UART(RS232)				
Cascade	Max. channels expand	---	16 Ch (4x Device, 1 Master & 3 Slaves)			
	Trigger source	---	Main device only			
	Skew between Master & Slave	---	±2ns @ 1 GS/s ; ±4ns @ 500 MS/s ; ±8ns @ 250 MS/s			

[1] Optional DP_Aux adapter needed.

[2] To measure RS422/485, need to optional the ADP high-voltage differential probe.

[*] Free update by year end

Logic Analyzer Specifications (LA POD)

Device LA POD	MSO3124E LA16E	MSO3124B LA16B	MSO3124H LA16H	MSO3124V LA16V
Timing analysis (Asynchronous, Max. sample rate)			2 GS/s	
State clock rate (Synchronous, external clock)			250MHz	
Storage		Conventional Timing, Transitional Timing		
Channels		16		
Record length		256 Mpts per channel		
Timing vs. Channels	Timing analysis 2 GS/s 1 GS/s	Available channels (Conventional / Transitional Timing) - Memory per channel (8/7)-512 Mpts (16/14)-256 Mpts		
vs. Memory	500 MS/s 250 MS/s	(16/16)-256 Mpts (16/16)-256 Mpts		
Channel to channel skew		< 1ns		
Input	Input channels Input impedance Maximum (Non-destructive) Operation Sensitivity	16 75KΩ <2pF ±50V ±30V 0.25Vpp @50MHz, 0.5Vpp @150MHz, 0.8Vpp @250MHz		
Threshold	Group Range Resolution Accuracy	2 (D0~D7, D8~D15 & CK0) ±30V 50mV ±100mV + 5%*Vth		
Trigger	Resolution Channels States Events Pre / Post Pass counter	500ps 16 8 8 Yes Yes (0~1048575 times)		
Protocol Analyzer	Types Protocol I Protocol II Protocol III	External, Manual, Multi Level, Setup/Hold Violation, Single Level, Timeout, Width BiSS-C, CAN2.0B/CAN FD, DP_Aux ^[1] , HID over I2C, I2C, I2S, LIN2.2, MIPI I3C 1.1, SENT, SPI, UART, USB PD 3.1 DALI, LPC, MDIO, Mini/Micro LED, MIPI RFFE 3, MIPI SPMI 2, Modbus, PMBus, Profibus, SMBus, SVI2, USB1.1 eMMC 4.5, eSPI, MII, RGMII, RMII, SD 3.0 (SDIO 2.0), Serial Flash (SPI NAND), SVI3 ^[2] , SVID ^[3]		
Protocol Decode	I II III	BiSS-C, CAN2.0B/CAN FD, DP_Aux ^[1] , HID over I2C, I2C, I2S, LIN2.2, MIPI I3C 1.1, SPI, UART, USB PD 3.1 DALI, MDIO, MIPI RFFE 3, Modbus, PMBus, Profibus, SMBus, USB1.1 eSPI, MII, RGMII, RMII, SVI3 ^[2] , SVID ^[3]		
Line Decoding	Biphase Mark, Differential-Manchester, Manchester (Thomas, IEEE802.3), Miller, Modified Miller, NRZI, ...			
Line Encoding	AMI(Standard, B8ZS, HDB3), Biphase Mark, CMI, Differential-Manchester, Manchester (Thomas, IEEE802.4), MLT-3, Miller, Modified Miller, NRZI, Pseudoternary, ...			
Packing List	LA POD Flying lead cables (LA20P) Gripper	1 2 20		

[1] Optional DP_Aux adapter needed.

[2] Upon request by user who is approved by AMD. SVI3 decode, trigger and protocol analyzer are supported ONLY by MSO3124H or MSO3124V.

[3] Upon request by user who has signed CNDA with Intel. SVID decode, trigger and protocol analyzer are supported ONLY by MSO3124H or MSO3124V.


DAQ

For real-time signal data monitoring.

DSO


Multiple Devices Stack Mode :

Support DSO stack mode, up to 4 devices (16 channels) can be stacked together in the same time.

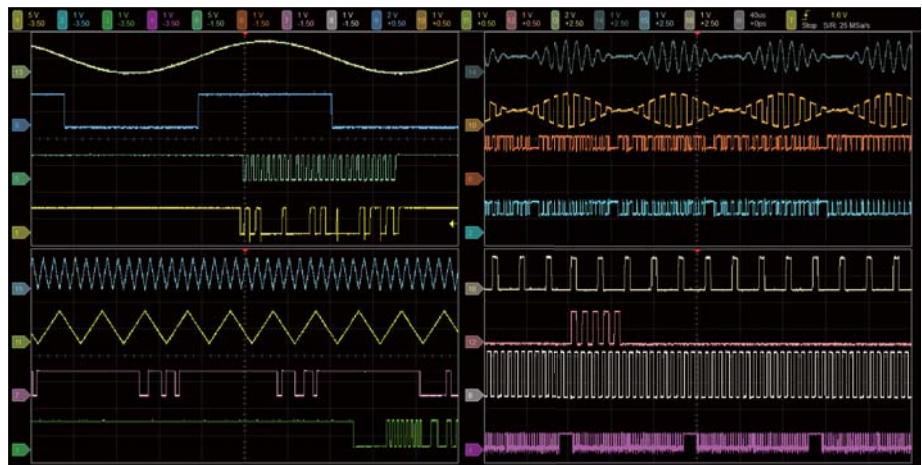


Functions :


- **Edge Trigger** : Trigger on a rising/falling/either.
- **Pattern Trigger** : Trigger when logic inputs cause the selected function goes true.
- **Trigger Hold off** : Hold off time adjustable up to 10s.
- **Runt Trigger** : Use 2 voltage thresholds and pulse width to trigger on either/ positive or negative runt signals.

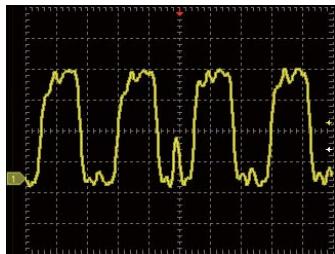


Positive Runt

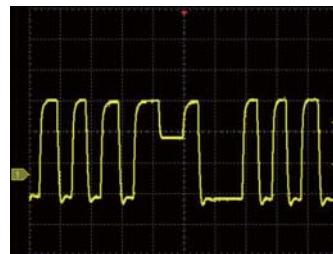

Negative Runt

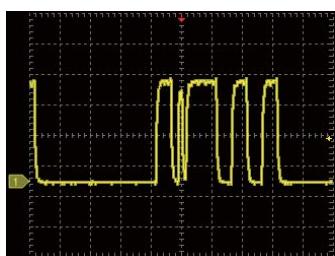


Pulse Width Trigger
Pulse width range
from 8ns to 50s.

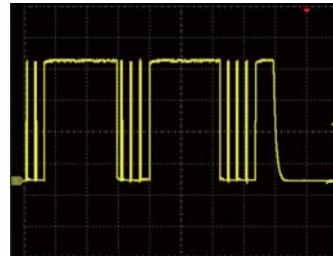


Timeout Trigger
Trigger when no pulse
is detected within a
specified time, range
from 8ns to 50s.

- **Spectrum analysis**
(Fast Fourier transform, FFT)
Apply FFT to the selected channel.

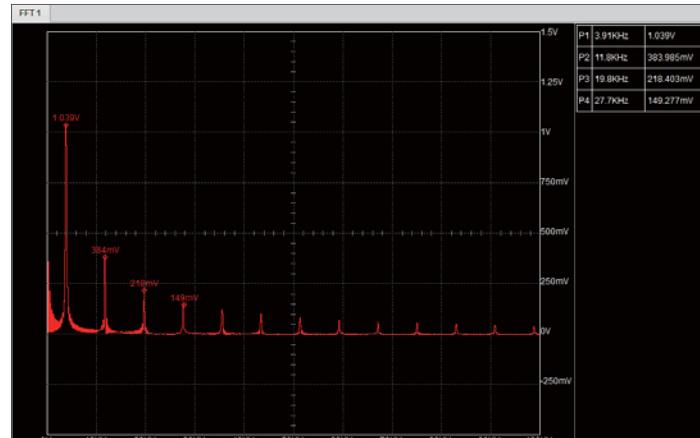

• Math


Add, Subtract, Multiple, Divide, XY, Absolute, Square Root, LogA, LnA, Exponential, Integral

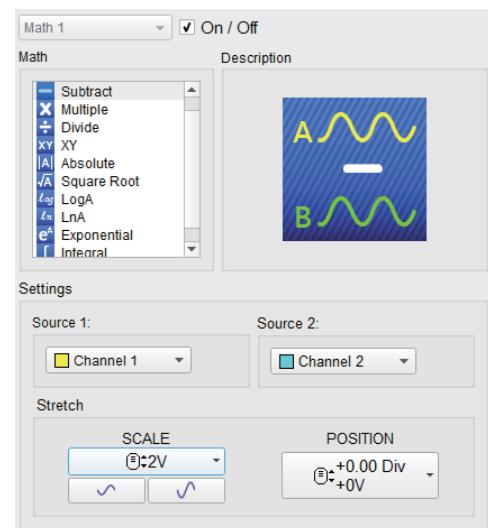

• Vertical Offset

Right-press the mouse to offset the voltage vertically with the resolution from 2mV/Div to 10V/Div for both channels.

The 16-bits resolution MSO3124H provides more noise details for this vertical offset function.

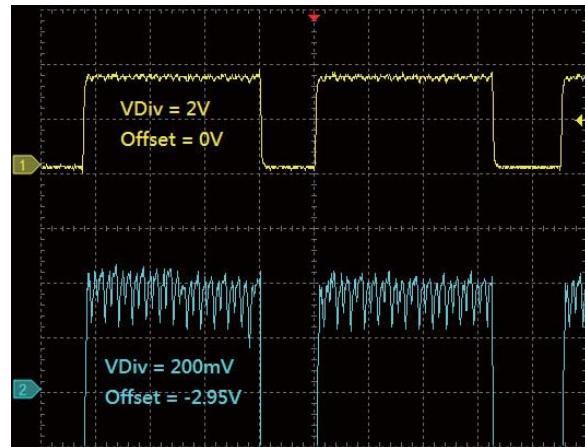

• Trigger Coupling Mode

Provide DC Coupling, Low Frequency (LF) Reject, High Frequency (HF) Reject and Noise Reject function:


LF Reject: Apply 50 kHz high pass filter to the signal before entering the Trigger circuit.

HF Reject: Apply 50 kHz low pass filter to the signal before entering the Trigger circuit.


Noise Reject: Lower the Trigger sensitivity to avoid false triggering.

• Protocol Decode & Trigger Function

Provides, CAN/CAN-FD, I²C, LIN, MIPI I3C 1.1, ProfiBus, SPI, UART(RS232), USB1.1,... protocol decode and trigger function, which is able to trigger and decode on the specified Command/Address/Data...

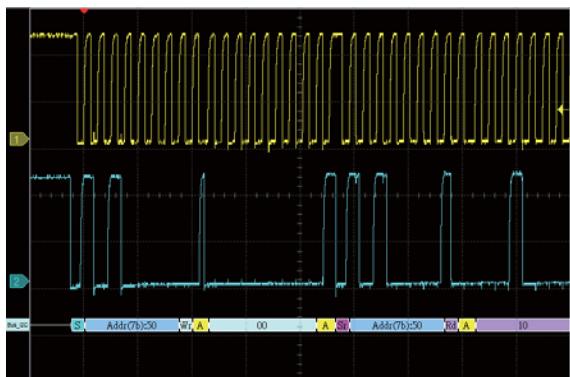


Decode the I²C waveforms

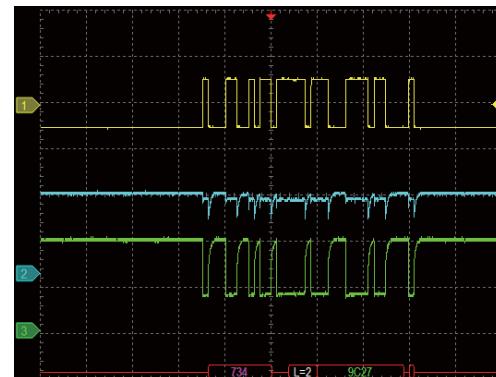

Decode the differential CAN signals with a differential probe.
(CH1: Differential Probe, CH2: CAN H, CH3: CAN L)
※ Supports CAN-FD, CAN2.0

• Multiple Windows




Multiple Window feature provides 4 display types (1x1, 2x1, 1x2, 2x2), which could displays 16 channels in maximum 4 different windows, provides clear waveform readability without lower the vertical resolution.

• Measurement :

More than 20 types of waveform measurements with customized threshold settings features, provides real-time update for vertical, time and channel to channel timing measurements with statistic features.

- Time: Frequency, Period, \pm Duty, \pm Period, Rise /Fall Time, Delay, Phase
- Vertical: VMax, VMin, VHigh, VLow, Vpp, VAmp, VMid, VMean, VRMS, \pm Overshoot, Rise /Fall Preshoot
- Counter: Edge Count, \pm Pulse Count

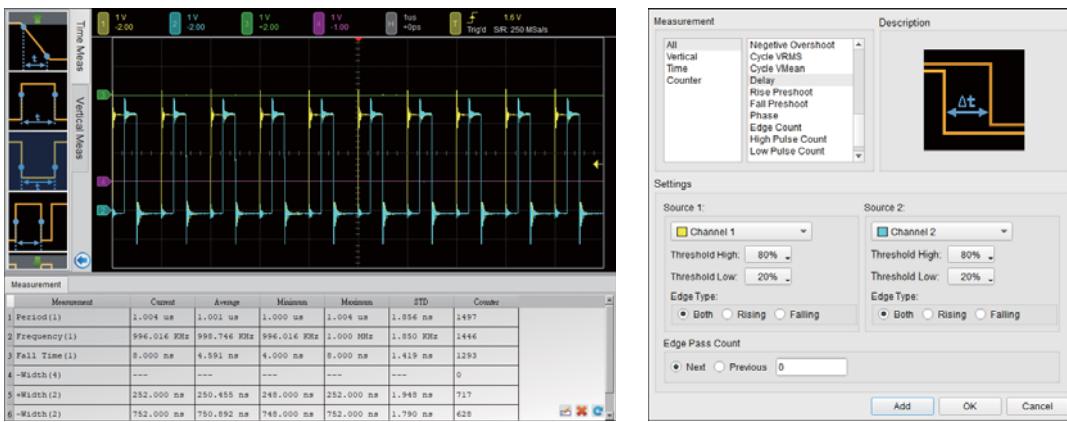

Digital Voltmeter (DVM) & Frequency Counter

Provides voltage root-mean-square, voltage average and frequency counter function for the selected channel.



Measure 1 KHz, 2.5 Vpp square waveforms by the measurement function.



Measure 1 KHz, 2.5 Vpp square waveforms by the DVM function.

Packing List



Device



USB3.0 Y cable (1.8M)
Type-C OTG Adapter



250 MHz Probe



Stack cable



Handbag

Logic Analyzer

Built-in DSO to capture analog waveforms to compare with the digital waveforms.

Provides multiple storage modes, users could select to have long time recording or precision acquisition.


LA Storage mode

Conventional Storage  Signal Rate 200MHz

Transitional Storage  Signal Rate 200MHz

Streaming to PC RAM  ≤ Signal Rate 200MHz
(Depends on PC's performance)

Streaming to PC HDD  ≤ Signal Rate 200MHz
(Depends on PC's performance)



LA Device RAM

PC RAM


PC HDD

Short time ——————→ Long time

Analog waveform

Input Sensitivity: 2mV/div to 10V/div; Max. Sampling Rate: 1GS/s @ 1Ch


Can be used with High Voltage probe, Differential probe or Current probe.

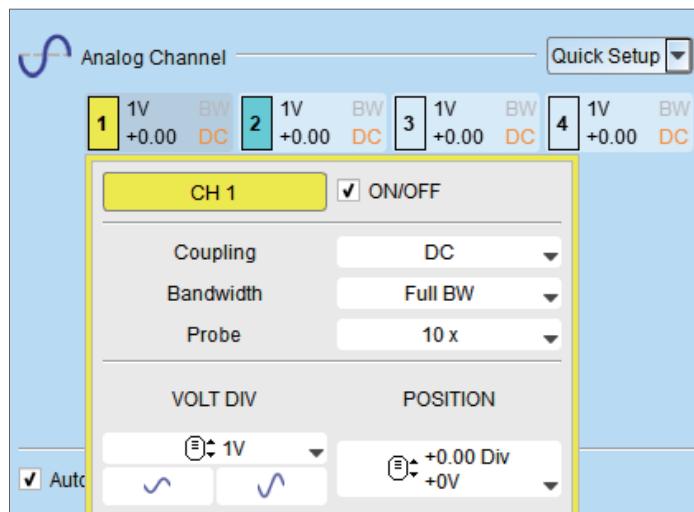


Digital waveform

Operation Range: ±30V

Max. Timing Analysis: 2GS/s @ 8Ch

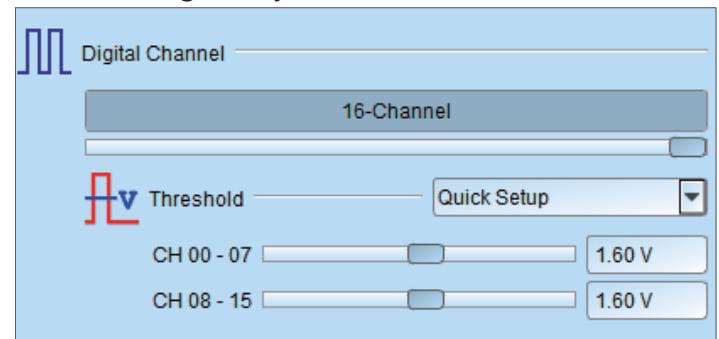

Compare digital and analog waveforms at the same channel for statistics.

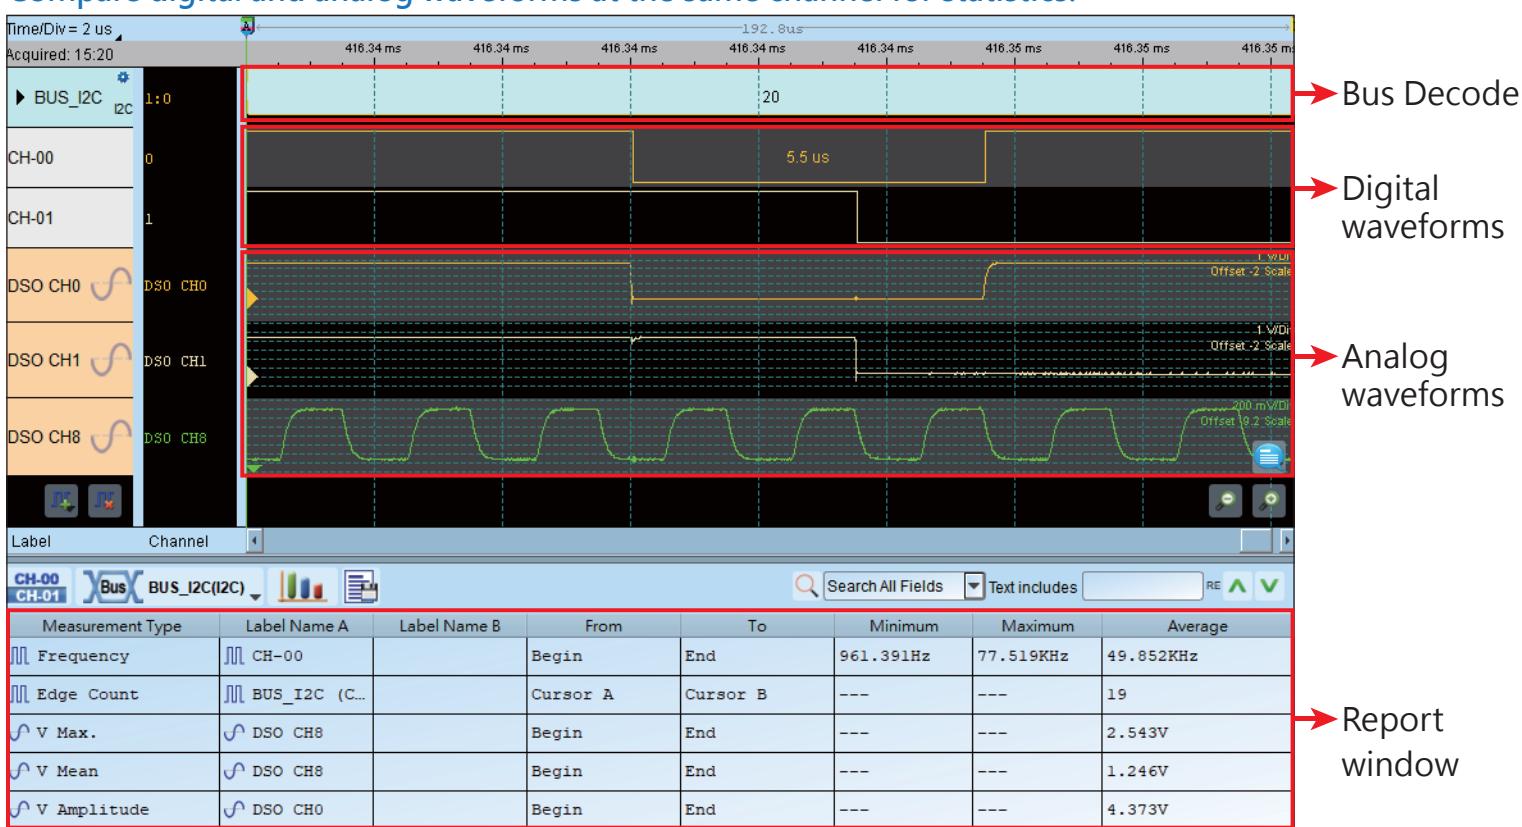

Bus Decode

Digital waveforms

Analog waveforms

Report window

Protocol Analyzer


It is hardware decoding, may log protocol data very long time if without waveforms.

Application timing: Preliminary protocol debug.

Support multiple protocols with different operating modes

Real-time data search

Stack with a DSO as an MSO in logic analyzer mode

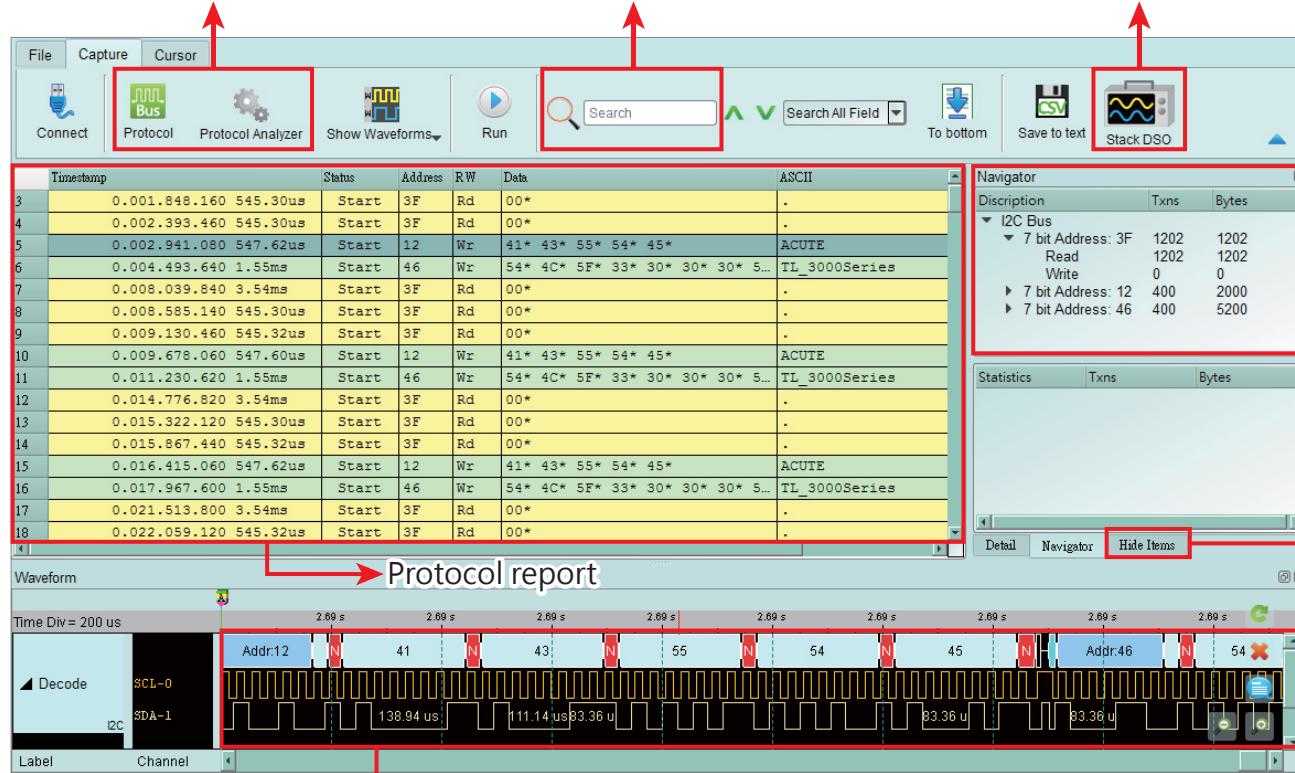

Real-time data statistics


Hide items for easy view



Protocol Analyzer

Show real-time protocol data

Application timing: massive protocol data with some idles in between

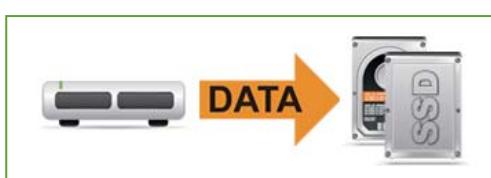

Protocol Logger

Like data logger, save massive data into SSD hard drive

Application timing: massive protocol data



Protocol Monitor

Like dash cameras, record protocol data by the device's memory only

Application timing: trigger event only happens in very long time

Packing List



LA POD



Flying lead cables (LA20P)



Gripper