

Acute TravelLogic

Logic Analyzer & Protocol Analyzer




123 x 76 x 21 mm³

- PC-based
- USB 3.0 Interface
- 34 Channels
- 2 GHz Timing / 250MHz State Analysis
- 8Gb Memory (Max.)
- Data logger saved to hard disk drive
- Analog Inputs (2) for Protocol Analyzer
- Stacks with Acute or another DSO to form as an MSO
- Bus Decode : BiSS-C, CAN 2.0B/CAN FD, DP_Aux¹, DMX512, EDID, eMMC 4.5, eSPI, I²C, I²S, MII, MIPI DSI LP, MIPI I³C 1.1.1, NAND Flash, NEC IR, Profibus, SD 3.0 (SDIO 2.0), Serial Flash, SPI, SVID², SWD, UART (RS232), USB1.1, USB PD 3... (100+)
- Bus Trigger I : BiSS-C, CAN2.0B/CAN FD, DP_Aux¹, I²C, I²S, MIPI I³C 1.1.1, SPI, UART, USB PD 3, ...
- Bus Trigger II : DALI, LPC, Mini/Micro LED, MIPI I³C 1.1.1, Profibus, SMBus, SVI2, USB1.1, ...
- Bus Trigger III : eMMC 4.5, eSPI, MII, RGMII, RMII, NAND Flash, SD 3.0 (SDIO 2.0), SVID³, ...
- Protocol Analyzer I : BiSS-C, CAN2.0B/CAN FD, DP_Aux¹, I²C, I²S, MIPI I³C 1.1.1, SPI, USB PD 3, ...
- Protocol Analyzer II : DALI, MDIO, MIPI RFFE 3, Modbus, PMBus, Profibus, SMBus, USB1.1
- Protocol Analyzer III : eSPI, MII, RGMII, RMII, SVID³


Model	Channels	Sample Rate	Memory	Bus Trigger	Protocol Analyzer
TL4134E	34	2GHz	4Gb	I	I
TL4134B	34	2GHz	4Gb	I, II	I, II
TL4234B	34	2GHz	8Gb	I, II, III	I, II, III

Software Window

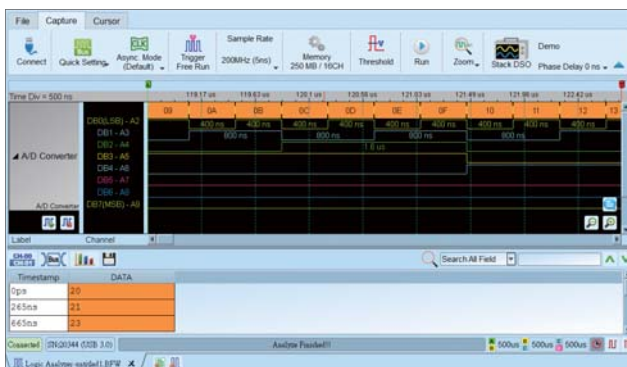

System Requirements

- USB 3.0 port
- Win 7, Win 8, Win 10, Win11
- PC RAM 16GB (recommended) or 8GB at least

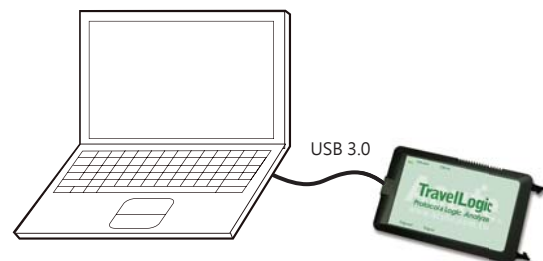

Acute

PC-based T&M Instruments

Acute Technology Inc.

Tel: +886-2-2999-3275 E-mail: service@acute.com.tw <http://www.acute.com.tw>




Protocol Analyzer:

It is hardware decoding, may log protocol data very long time if without waveforms.
Application timing: Preliminary protocol debug.

Support multiple protocols with different operating modes

Real-time data search

Stack with a DSO as an MSO in logic analyzer mode

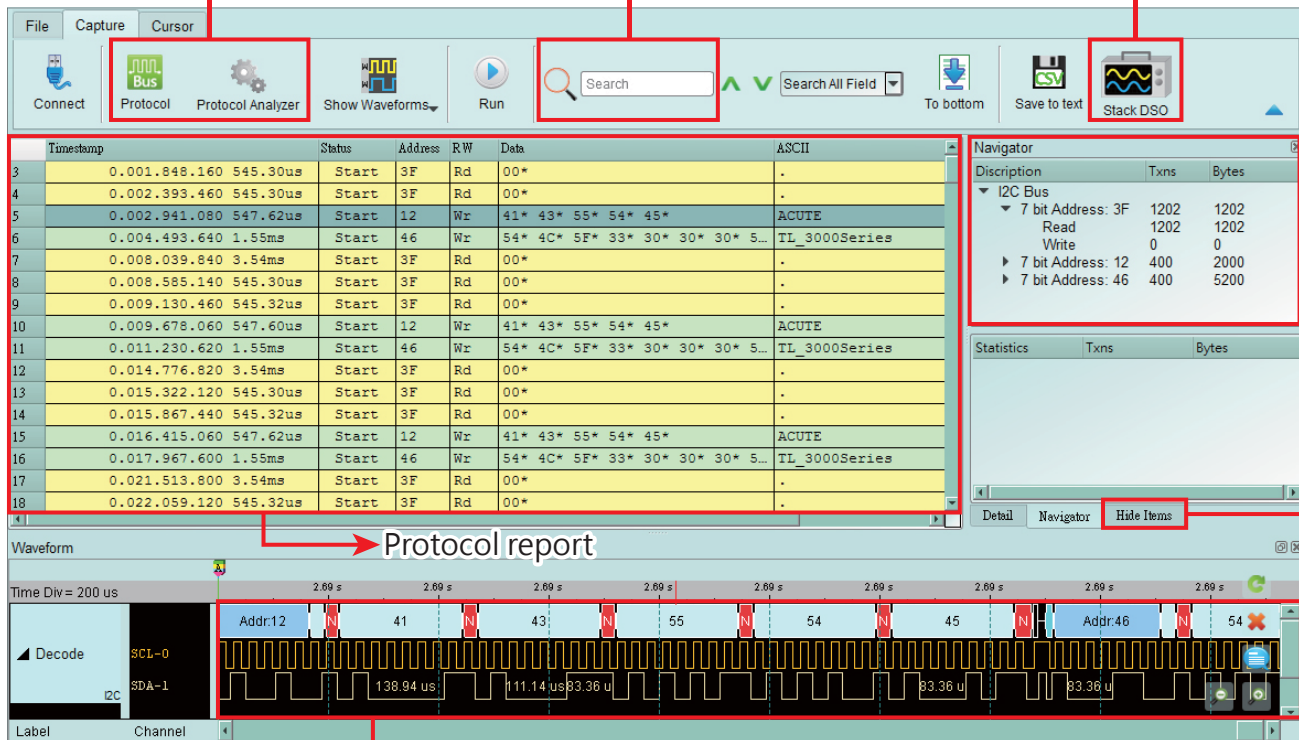

Real-time data statistics

Hide items for easy view

Protocol report

Show waveforms with bus decodes



Protocol Analyzer

Show real-time protocol data

Application timing: massive protocol data with some idles in between



Protocol Logger

Like data logger, save massive data into SSD hard drive

Application timing: massive protocol data



Protocol Monitor

Like dash cameras, record protocol data by the device's memory only

Application timing: trigger event only happens in very long time

Packing List :



TL4134E



TL4134B / TL4234B



8.5cm Lead Cable
TL4234B only



18.5cm
Lead Cable



USB 3.0 cable



Grippers

Stack cable




Handbag

Logic Analyzer:

Capture digital waveforms and support bus decodes. Able to stack with a DSO to form as an MSO.

Provides multiple storage modes, users could select to have long time recording or precision acquisition.

LA Storage mode

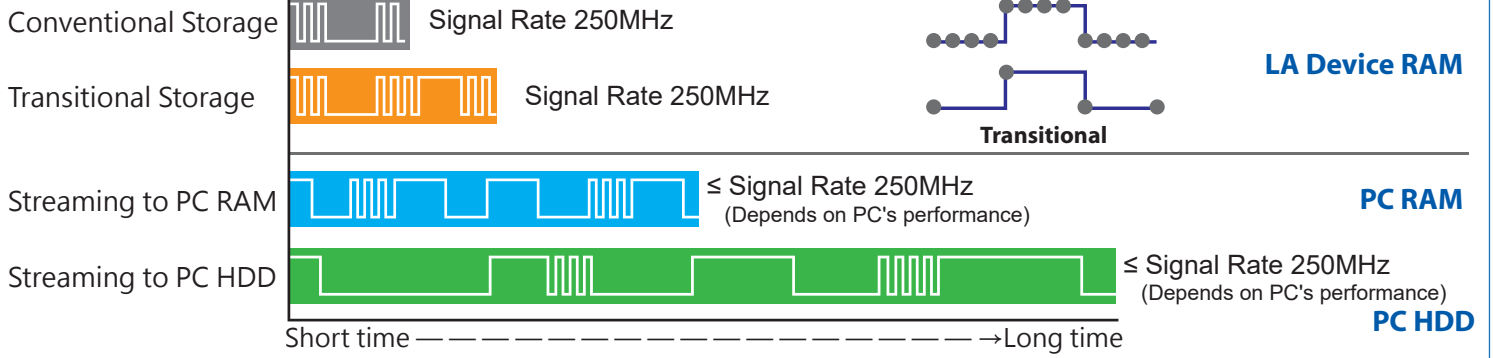

Flow chart bus triggers :

Channel: SCK 0, SDA 1

Simple Trigger: Frame Start, Repeat Start, Frame Stop, ACK, NACK

Clause Trigger: Run, State 1, State 2, State 3, Counter 1

State 1: Event 1, Address Mode: 7-Bit Addressing, Value: 12h, R/W: ---, ACK: ---, Data: Any Position, 0 Byte(s), XXh, XXh, XXh, XXh

Power trigger for serial bus, 8-states flow chart setting with Counter/Timer

Detail parameters for each states

Quick View

Right-click and drag on the clock waveform to see the frequency and the number of transitions

Clear setting: Quick Setting, Trigger I2C, Sample Rate 50MHz (20ns)

Single or repetitive captures: Run, Repeat

Fast DSO stack setting: Demo-(Acute DSO), Stack DSO, Phase Delay 0 ns

Decode(SCL): Transition=10, Interval=133us, Freq.(avg)=35.99KHz

User mark: Editable text or graphic in waveform area

Display digital and analog waveforms at the same phase

Sample	Status	Address	D0	D1	D2	D3	D4	D5	D6	D7	D8	D9	D10	D11	D12	D13	D14	D15	ASCII
1	Ops	Rd 3F	00																.
2	547.62us	Start	Wr 12	41	43	55	54	45											ACUTE
3	2.10016ms	Start	Wr 46	54	4C	5F	33	30	30	30	53	65	72	69	65	73			IL_3000Series
4	5.64638ms	Start	Rd 3F	00															.

Report window

TL4000 series

Model		TL4134E	TL4134B	TL4234B
Power	Power Source	USB bus-power (+5V)		
	Static Power Consumption	0.8W		
	Max Power Consumption	3W		
Hardware Interface	USB 3.0			
Timing Analysis (Asynchronous, Max. Sample Rate)	2GHz			
State Clock Rate (Synchronous, External Clock)	250MHz			
Storage	Conventional Timing, Transitional Timing			
Channels (Data / CLK / Analog / GND)	32 / 2 / 2 / 4			
Total Memory	4 Gb		8 Gb	
Timing vs. Channels vs. Memory	Timing Analysis	Available channels (Conventional / Transitional Timing) - Memory per channel		
	2GHz	(8/7)-512Mb		(8/7) - 1Gb
	1GHz	(16/14)-256Mb		(16/14) - 512Mb
	500MHz	(32/28)-128Mb		(32/28) - 256Mb
250MHz	(32/32)-128Mb		(32/32) - 256Mb	
Channel to channel skew	< 1ns			
Threshold	Group	4 (ch0~7, ch8~15 & clk0, ch16~23, ch24~31 & clk1)		
	Range	+5V ~ -5V		
	Resolution	50mV		
	Accuracy	±100mV + 5%*Vth		
Input Voltage	Non-Destructive Operation	±30V DC, 12Vpp AC		
	Sensitivity	+10V ~ -10V		
		0.25Vpp @50MHz, 0.5Vpp @150MHz, 0.8Vpp @250MHz		
Impedance	Data channels	200KΩ//<7pF		
	Analog channels	20KΩ//<3pF		
Analog Inputs (2) (Protocol Analyzer)	Maximum (Non-destructive) Operation	-0.5V ~ +8V DC+AC peak		
	Resolution	0V ~ 4V		
	Sampling Rate	12 bits		
		250KHz		
Temperature	Operating / Storage	5°C~40°C (41°F~104°F) / -10°C~65°C (14°F~149°F)		
I/O port	Trig-In	TTL 3.3V level (Rising / Falling)		
	Trigger pulse approval	> 8 ns		
	Trig-Out	TTL 3.3V, Pulse Width		
	Ref. Clock Input	10MHz, Vpp=3.3 to 5V		
	Ref. Clock Output	10MHz, TTL 3.3V		
	Connector type	MCX jack / female		
Trigger	Resolution	500ps		
	Channels	32		
	States	16		
	Events	16		
	Pre / Post	Yes		
	Pass Counter	Yes (0~1048575 times)		
	Types	Channel, Pattern, Single / Multi Level, Width, Time-out, Setup / Hold Timing Violation, External, Manual		
	Bus I	10BASE-T1S ¹ , BiSS-C, CAN2.0B/CAN FD, DP_Aux ¹ , HID over I2C, I2C, I2S, LIN2.2, MIPI I3C 1.1.1, SENT, SPI, UART (RS232), USB PD 3		
	Bus II	---	DALI, LPC, MDIO, Mini/Micro LED, MIPI RFFE 3, MIPI SPMI 2, Modbus, PMBus, Profibus, SMBus, SVI2, USB1.1	
	Bus III	---	eMMC 4.5, eSPI, MII, NAND Flash, RGMII, RMII, SD 3.0 (SDIO 2.0), Serial Flash (SPI NAND), SVID ³	
Protocol Analyzer/ Protocol Logger / Protocol Monitor	I	10BASE-T1S ¹ , BiSS-C, CAN2.0B/CAN FD, DP_Aux ¹ , HID over I2C, I2C, I2S, LIN2.2, MIPI I3C 1.1.1, SPI, UART (RS232), USB PD 3		
	II	---	DALI, MDIO, MIPI RFFE 3, MIPI SPMI 2, Modbus, PMBus, Profibus, SMBus, USB1.1	
	III	---	eSPI, MII, RGMII, RMII, SVID ³	
Software Features	Zoom In / Out	Yes		
	Language	English / Simplified Chinese / Traditional Chinese		
	Waveform Height	Adjustable		
	Zoom / Report Window	Yes		
	Quick Cursor-positioning	Yes		
	Import Label(s)	Yes		
	Quick Bus Decode Setup	Yes		
	Trigger / Auxiliary cursors	1/25		
	Data Logger	Saved to Hard Disk Drive		
	Protocol Decode	1-Wire, 3-Wire, 7-Segment, 10BASE-T1S ¹ , A/D Mux Flash, AccMeter, ADC, APML, AVSBus, BiSS-C, BSD, BT1120, CAN 2.0B/FD, Close Caption, CODEC_SSI, DALI, DMX512, DP_Aux ¹ , EDID, eMMC 4.5, eSPI, FlexRay, HD Audio, HDLC, HDQ, HID over I2C, HTSensor, I2C EEPROM, I2C, I2S (PCM, TDM), I80, IDE, IO-Link, IrDA, ISELED, ITU-R BT.656 (CCIR656), J1850, JTAG, JVC IR, LCD1602, LED_Ctrl, LIN 2.2, Line Decoding, Line Encoding, Lissajous, LPC, LPT, Math, M-Bus, MCTP over I2C/ I3C/ SMBus, MDDI, MDIO, MHL CBus, Microchip SWI, Microwire, MII, Mini/Micro LED, MIPI CSI LP, MIPI DSI LP, MIPI I3C 1.1.1, MIPI RFFE 3, MIPI SoundWire 1.2, MIPI SPMI 2, Modbus, NAND Flash, NEC IR, OA3p, OATC6, PDM, PECl 3.0, PMBus, Profibus, PS/2, PWM, QEI, QI, QSPI, RC-5, RC-6, RGB Interface, RGMII, RMII, S/PDIF, SD 3.0(SDIO 2.0), SENT, Serial Flash, Serial IRQ, SGPIO, Smart Card, SMBus (SBS, SPD), SMI, SPI, SPI-NAND, SSI, ST7669, SVI2, SVID ² , SWD, SWIM, SWP, TDM, UART (RS232), ULPI, UNI/O, USB 1.1, USB4/TBT3 SB Channel, USB PD 3, Wiegand, ...		
Line Decoding	Biphase Mark, Differential-Manchester, Manchester (Thomas, IEEE802.3), Miller, Modified Miller, NRZI, ...			
Line Encoding	AMI(Standard, B8ZS, HDB3), Biphase Mark, CMI, Differential-Manchester, Manchester (Thomas, IEEE802.4), MLT-3, Miller, Modified Miller, NRZI, Pseudoternary, ...			
Dimension	L x W x H (mm ³)	123 x 76 x 21 (mm ³)		
Lead Cable	(Data / CLK / Analog / GND)	A 40-pin lead cable (32 / 2 / 2 / 4)		
Grippers		40		

¹ Optional 10BASE-T1S / DP_Aux adapter needed.

² Upon request ONLY by users who have signed CNDA with Intel, SVID decode supported by all TL4000 models.

³ Upon request ONLY by users who have signed CNDA with Intel, SVID trigger & PA supported by TL4234B ONLY.

Specifications marked in BLUE are different from TL3000 series.