

BusFinder		
Model	BF7264B	BF7264B+
Power	Power Source	12V Power adapter
	Static Power Consumption	18W
	Max Power Consumption	45W
Hardware Interface		USB 3.0
Timing Analysis (Asynchronous, Max. Sample Rate)		2.4GHz
State Clock Rate (Synchronous, External Clock)		300MHz
Storage		
Channels (Data / Clock)		64/4
Total Sample Memory		32 Gb
Timing vs. Channels vs. Memory	Timing Analysis	Available channels (Conventional / Transitional Timing) - Memory per channel
	2.4 / 2GHz	(32 / 28) - 1Gb
	1GHz	(64 / 56) - 500Mb
500 / 250 / 200MHz		(64 / 64) - 500Mb
	Resolution	416 ps
	Channels	64
Trigger	States	8
	Events	8
	Pre / Post / Delay	Yes
	Pass Counter	Yes (1 ~ 1000000 times)
	Types	Channel, Pattern, Single / Multi Level, Width, Time-out, External
	Bus (by option)	eMMC 5.1, NAND Flash, SD 3.0 (SDIO 3.0), Serial Flash (SPI NAND), SPI
Input Voltage	Maximum	See Tip specification
	Sensitivity	See Tip specification
Impedance		See Tip specification
Temperature	Operating / Storage	5°C~45°C (41°F~113°F)/-10°C~65°C (14°F~149°F)
Channel to channel skew		
I/O port	Trig-In	TTL 3.3V level (Rising / Falling)
	Trigger pulse approval	> 8ns
	Trig-Out	TTL 3.3V
	Ref. Clock Input	10MHz, Vpp=3.3 to 5V
	Ref. Clock Output	10MHz, TTL3.3V
	Connector type	MCX jack/female
	Protocol Option	eMMC 5.1
MIPI D-PHY 1.2		SMPM Cable / End-tip
NAND Flash		Flying lead cable / Gripper
SD 3.0 / SDIO 3.0		SD 3.0 extender card / SDIO 3.0 extender card & Flying lead cable
SD 4.1		SD 4.0 extender card (covers SD 3.0)
UFS 2.1		Con Fixture / SMPM Cable / End-tip
Logic Analyzer		
Zoom In / Out		Yes
Languages		English / Traditional Chinese / Simplified Chinese
Waveform Height		Adjustable
Software Features	Zoom / Report Window	
	Yes	
	Quick Cursor-positioning	
	Yes	
	Import Label(s)	
	Yes	
Quick Bus Decode Setup		
Yes		
Trigger / Auxiliary cursors		
1/25		
Bus Decode		eMMC 5.1, NAND Flash, SD 3.0, Serial Flash (SPI NAND), SPI
Dimension	L x W x H	270 x 175 x 55 (mm ³)
Weight		See Protocol Option

※ For BF7264B / B+, the maximum delivery Gripper number is 80 Grippers per mainframe unit.

Acute BusFinder

Protocol Analyzer & Logic Analyzer



270 x 175 x 55 (mm³)

- PC-based, 64 channels
- USB 3.0 interface, 12V power adaptor
- 32Gb total memory


Protocol Analyzer: eMMC 5.1, MIPI D-PHY 1.2, NAND Flash, SD 3.0 (SDIO 3.0), SD 4.1 (UHS-II), UFS2.1 (BF7264B+ Only)

- Real-time data display, post-capture waveforms
- Trigger for commands or data
- Different active probes for different protocols for easier connections
- Filter data to save more commands
- Hide data for easy reading
- Search data for quick finding
- Statistics for commands and data
- Two voltage detects to find design bugs from voltage drop
- Use PC hard disk (SSD) to log long time data
- Protocol monitor like dash camera for long time surveillance (months)

Logic Analyzer: eMMC 5.1, NAND Flash, SD 3.0 (SDIO 3.0), Serial Flash, SPI

- 2.4GHz timing analysis
- 8-state flow chart bus triggers
- Bus decodes with waveforms
- Stacks with a DSO to form as an MSO

Software Window

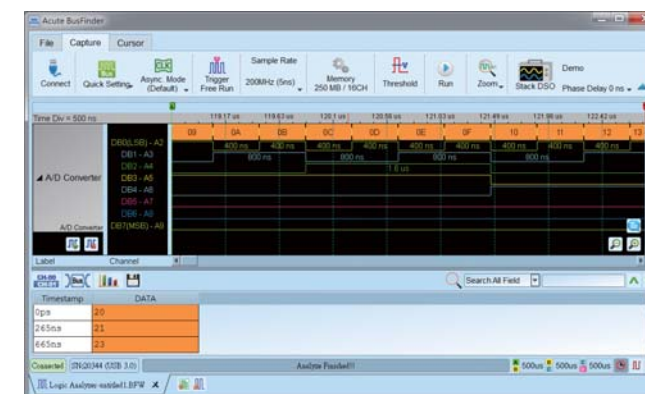

System Requirements

- USB 3.0 port
- Win 7, Win 8, Win 10 (64 bit)
- PC RAM 16GB (recommended) or 8GB at least



© 2020 All right reserved. Acute Technology Inc. Acute and Acute logo is a registered trademark of Acute Technology Inc.



BusFinder

Device weight : 800g, Accessories weight : 1216g



Device *1



BNC to MCX *1




USB3.0 (1.8M) *1




Adapter/Power cord *1

MIPI D-PHY Option


weight : 410g

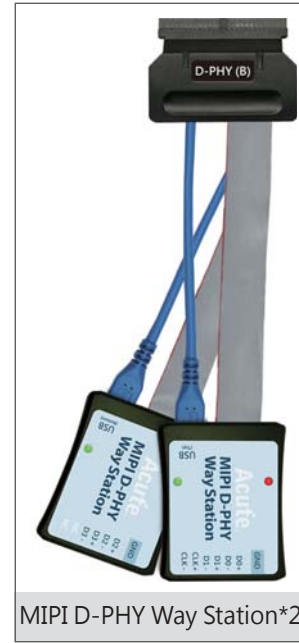

MIPI D-PHY Way Station*2

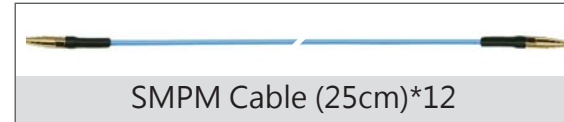


SMPM Cable (25cm)*12

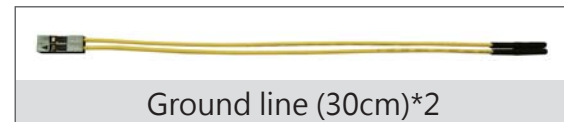

Ground line (30cm)*2



SMPM Extraction Tool*1




End-tip*10




Micro USB 3.0 *2

UFS 2.1 Option (BF7264B+ Only)


weight : 550g

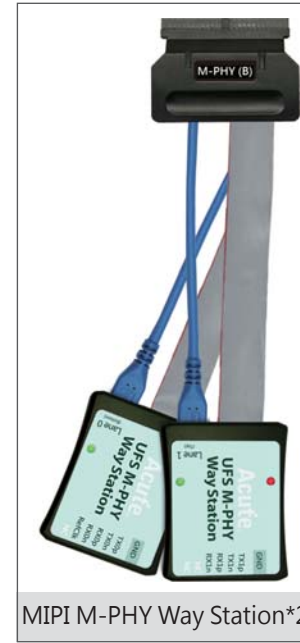

MIPI M-PHY Way Station*2

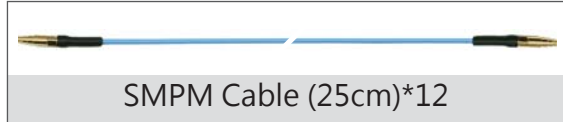


SMPM Cable (25cm)*12

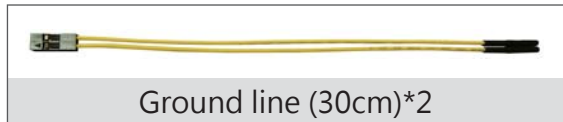


Ground line (30cm)*2




SMPM Extraction Tool*1

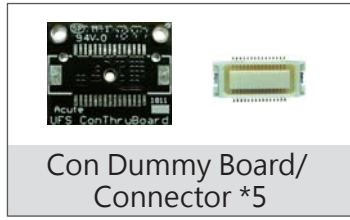

Con Dummy Board/
Connector *5



UFS-BGA-tip *2

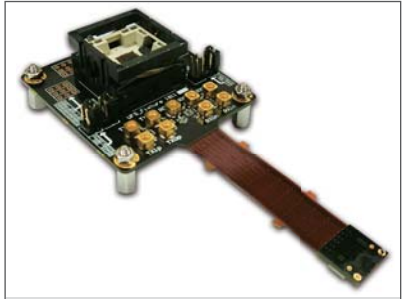

Con Fixture*1



FPC End-tip*10/ Connector*5



Micro USB 3.0 *2

LA Option

weight : 410g



LA08-tip*2 / LA09-tip*2



Flying lead cable (LA) *4



Gripper *40

NAND Flash Option

weight : 226g



LA08-tip*1, LA09-tip*2
NAND-tip*1



LA20p*3 NAND16p*1
Flying lead cable (NF)*4

LA08-tip*1, LA09-tip*2


NAND-tip*1

eMMC 5.1 Option

weight : 230g



LA04 (B)-tip*1

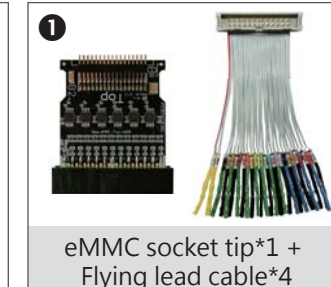

eMMC socket tip*1 +
Flying lead cable*4

eMMC welding tip *4

SD 3.0 / SDIO3.0 Option

weight : 160g



LA04 (B)-tip*1



eMMC socket tip (for SDIO 3.0)*1 +
Flying lead cable*1

eMMC welding tip (for SDIO 3.0)*4

SD 3.0 tip*1


SD 4.1 Option

weight : 420g

SD 4.1 Probe



Micro USB 3.0 *1

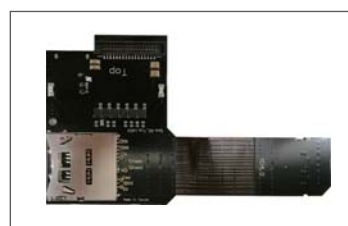


LA04 (B)-tip*1

SD4.1-tip*1

uSD 4.1 Probe



Micro USB 3.0 *1

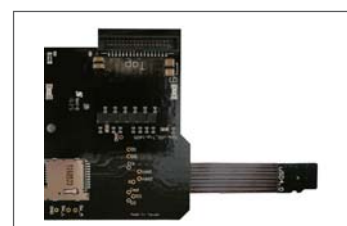

LA04 (B)-tip*1

uSD4.1-tip*1

Tip specification

*SE: Single Ended, Diff.: Differential Pair

Model	LA08/09	LA04 (B)	NAND / UFS	eMMC, SD 3.0	SD 4.1, uSD 4.1	End tip
Number of Channels	8 / 8+1 (Data+CLK)	4 (Data)	4+2 (Data+Analog)	12+2 (Data+Analog)	6-SE / 3-Diff. / 2 (SD3.0 / SD4.1 / Analog)	1-Diff.
Threshold of Data	Range	-0.5V ~ +4.8V			0V ~ +3.3V	---
	Resolution	21mV				---
	Accuracy	±100mV + 5%*Vth				---
Input Voltage of Data	Maximum (Non-destructive)	±15V DC+AC peak			-0.5V ~ +5V DC+AC peak	±10V
	Operation	-1V ~ 8V			0V ~ 3.3V	0 ~ 5V
	Sensitivity	~300mV			~150mV	~200mVpp.
Impedance of Data	1MΩ 5pF			500kΩ 2pF		1kΩ
	Maximum (Non-destructive)	---				---
Input Voltage of Analog	Maximum (Non-destructive)	---				---
	Operation	---			0V ~ 4V	---
	Resolution	---			~1mV	---
Impedance of analog	Sampling Rate	---			1M	---
	Impedance of analog	---			1MΩ 100pF	---